




CX8031 | Embedded PC for PROFIBUS

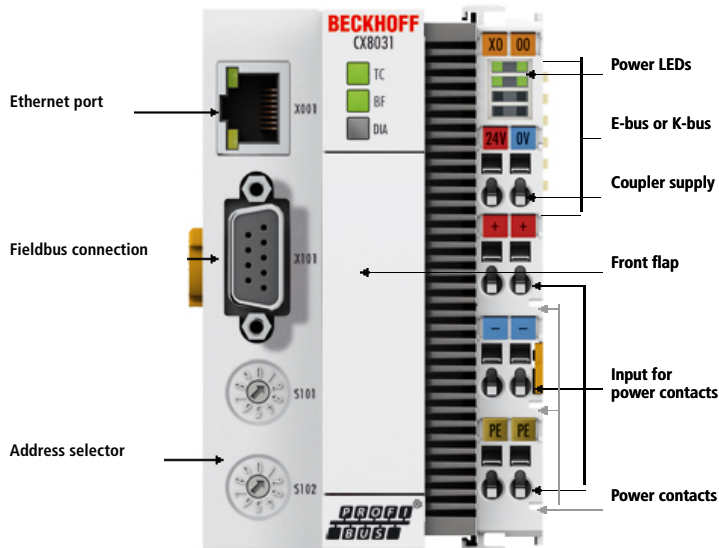

The CX8031 is a control system with PROFIBUS slave interface. The PROFIBUS address is set via two rotary selection switches. The CX8031 offers automatic baud rate detection. K-bus or E-bus terminals can be attached as required; the CX8031 automatically recognises the type of I/O system connected during the start-up phase. The control system is programmed with TwinCAT via the additional Ethernet interface.

Technical data	CX8031
Processor	ARM9, 400 MHz
Flash memory	512 MB microSD (optionally expandable)
Main memory	64 MB DDR2 RAM (not expandable)
Protocol	PROFIBUS-DP (slave)
Programming	TwinCAT 2 PLC
Programming languages	IEC 61131-3
Web visualisation	yes
Online change	yes
Up/down load code	yes/yes
Interfaces	1 x RJ45 10/100 Mbit/s, 1 x USB device (behind the front flap), fieldbus interface
Bus interface	1 x D-sub 9-pin socket with shielding
I/O connection	E-bus or K-bus, automatic recognition
Clock	internal battery-backed clock for time and date (battery behind the front flap, exchangeable)
UPS	1-second UPS (for 1 MB of persistent data)
Operating system	Microsoft Windows Embedded CE 6
Web-based management	yes
Current supply E-bus/K-bus	2 A
Max. power loss	3 W
Dimensions (W x H x D)	64 mm x 100 mm x 73 mm
Weight	approx. 180 g
Operating/storage temperature	0...+55 °C/-25...+85 °C
Relative humidity	95 %, no condensation
Vibration/shock resistance	conforms to EN 60068-2-6/EN 60068-2-27
EMC immunity/emission	conforms to EN 61000-6-2/EN 61000-6-4
Protection class	IP 20
Approvals/Markings	CE, UL, ATEX, IECEx
Ex-Marking	II 3 G Ex nA IIC T4 Gc II 3 D Ex tc IIIC T135 °C Dc Ex nA IIC T4 Gc Ex tc IIIC T135 °C Dc

Accessories	
CX1900-01xx	Optionally expandable memory ex factory. Instead of 512 MB microSD card: 1, 2, 4 and 8 GB microSD card
CX1900-01xx	Additionally expandable memory: 1, 2, 4 and 8 GB microSD card
System	
PROFIBUS	For further PROFIBUS products please see the system overview .