


IFT200

IFB3007-BPKG/M/V4A/US-104-DPS

Inductive sensors


Product characteristics

Inductive sensor
Metal thread M12 x 1
Quick disconnect
Increased sensing range
gold-plated contacts
Sensing range 7 mm; [nf] non-flush mountable

Electrical data

Electrical design	DC PNP
Operating voltage [V]	10...36 DC
Current consumption [mA]	10 (24 V)
Protection class	II
Reverse polarity protection	yes

Outputs

Output function	normally open
Voltage drop [V]	< 2.5
Current rating [mA]	100
Short-circuit protection	yes (non-latching)
Overload protection	yes
Switching frequency [Hz]	800

Monitoring range

Sensing range [mm]	7
Real sensing range (Sr) [mm]	7 ± 10 %
Operating distance [mm]	0...5.7

Accuracy / deviations

Correction factors	mild steel = 1 / stainless steel approx. 0.7 / brass approx. 0.5 / aluminium approx. 0.4 / copper approx. 0.3
Hysteresis [% of Sr]	3...15
Switch-point drift [% of Sr]	-10...10

Environment

Ambient temperature [°C]	0...100
Protection	IP 68 / IP 69K; "COP"


Tests / approvals

EMC	EN 61000-4-2 ESD: 4 kV CD / 8 kV AD EN 61000-4-3 HF radiated: 10 V/m EN 61000-4-4 Burst: 2 kV EN 61000-4-6 HF conducted: 10 V EN 55011: class B
MTTF [Years]	2006

IFT200

IFB3007-BPKG/M/V4A/US-104-DPS

Inductive sensors

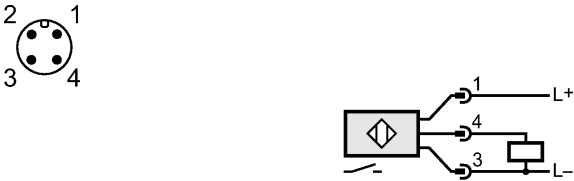Mechanical data		
Mounting		non-flush mountable
Housing materials		threaded sleeve: stainless steel (316L); active face: PEEK (polyether ether ketone); lock nuts: high-grade stainless steel
Weight	[kg]	0.027
Displays / operating elements		
Output status indication	LED	yellow (4 x 90°)
Electrical connection		
Connection		M12 connector; gold-plated contacts
Wiring 		
Accessories		
Accessories (included)		2 lock nuts
Remarks		
Pack quantity	[piece]	1