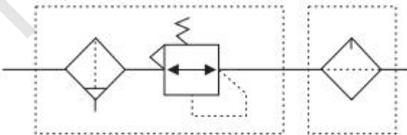


## AC2010 series

### Order Code 订货型号

**AC**

Series/系列号

AC series air filter  
combination FL unit  
系列空气过滤组合（二联件）

**2010**

Body Size 壳体尺寸

2010	4010
3010	5010

**02**

Thread port 螺纹接口

02:1/4"	06:3/4"
03:3/8"	10:1"
04:1/2"	

**-D**

Drainage method 排水方式


Blank: manual drainage 空白: 手动排水
A: Differential pressure drainage A: 压差排水
D: Automatic drainage D: 自动排水

### Specification 技术参数

Model 型号	AC2010-02	AC3010-02	AC3010-03	AC4010-03	AC4010-04	AC4010-06	AC5010-06	AC5010-10
	AC2010-02A	AC3010-02A	AC3010-03A	AC4010-03A	AC4010-04A	AC4010-06A	AC5010-06A	AC5010-10A
	AC2010-02D	AC3010-02D	AC3010-03D	AC4010-03D	AC4010-04D	AC4010-06D	AC5010-06D	AC5010-10D
Combine unit 组件	Filter pressure reducing valve 过滤器减压阀	AW2000	AW3000	AW3000	AW4000	AW4000	AW4000	AW5000
	Lubricator 油雾器	AL2000	AL3000	AL3000	AL4000	AL4000	AL4000	AL5000
Connect tube size (PT) 接管口径	1/4 "	1/4 "	3/8 "	3/8 "	1/2 "	3/4 "	3/4 "	1 "
Port size of pressure gauge 压力表口径	1/8 "	1/8 "	1/8 "	1/8 "	1/4 "	1/4 "	1/4 "	1/4 "
Rated flow (L/Min) 额定流量	500	1700	1700	3000	3000	3000	5000	5000
Working medium 工作介质	Air 空气							
Guarantee pressure resistance 保证耐压力	1.5Mpa (15.3kgf/cm <sup>2</sup> )							

最高使用压力 Max working pressure	1.0Mpa (10.2kgf/cm <sup>2</sup> )							
环境温度 Environment temperature	5~60°C							
过滤孔径 Filter hole size	5 μ m							
建议润滑油 Suggest lubricating oil	透平 1 号油 (ISO VG32)							
调压范围 Adjust pressure range	0.05~0.85Mpa							
脚架 Bracket (2 个)	Y20T	Y30T	Y30T	Y40T	Y40T	Y50T	Y50T	Y50T
压力表 Pressure gauge	Y40-6-1/8 Y40-6-1/8 Y40-10-18				Y50-6-1/4 Y50-10-1/4			
重量 Weight (kg)	0.66	0.98	0.98	1.93	1.93	1.99	2.7	2.7
主要配件材质 Main parts material	本体材质 Body	铝合金 Aluminum alloy						
	杯材质 Cup	PC						
	杯防护罩 Cup cover	AC2010: Without 无 AC3010-AC5010: With 有(Iron 铁)						

### Dimensions 尺寸

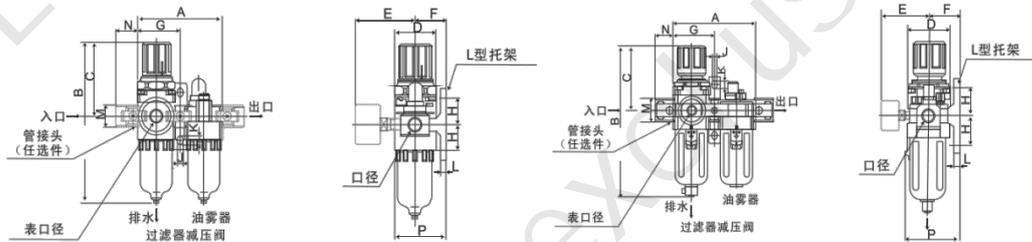

型号 Model	口径 Port size	A	B	C	D	E	F	G	H	J	K	L	M	N
AC2010	1/4"	0	164.5	78	40	56.8	30	45	24	5.5	8.5	5	22	22
AC3010	1/4", 3/8"	117	211	92.5	53	60.8	41	58.5	35	7	11	7	34.5	34.5
AC4010	3/8", 1/2"	154	262.5	112	70	70.5	50	77	40	9	13	7	42.2	42.2
AC4010-06	3/4"	164	267	114	70	70.5	50	82	40	9	13	7	46.2	46.2